


nannidiesel

energy in blue

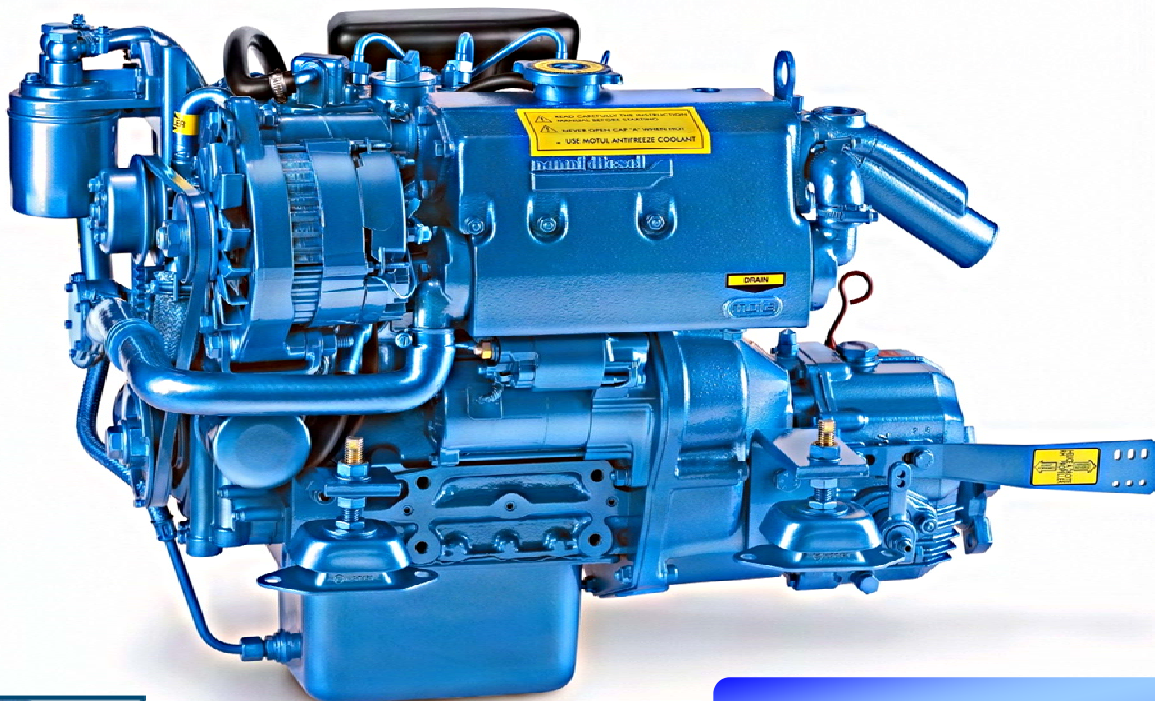

Kubota BASE

4.150 HE

27,6 kW (37.5 hp)


Technical Specifications

Power: kW (hp)	27,6 (37,5)
Maximum RPM	3000
Displacement: ci (cc)	91.4" (1498 cc)
N° of cylinders	4 in line
Bore / Stroke: in (mm)	3.07x3.086" (78x78,4 mm)
Compression Ratio	23 / 1
Injection	Indirect (E-TVCS)
Intake	Atmospherical
Cooling System	Heath Exchanger
Alternator	12 V 100 A
Instrument Panel	A 3
Transmission	Mechanical or hydraulical
Weight (incl trans) lb (kg)	319.7 lb (145 kg)

Hose Diameters

Exhaust: in (mm)	2.4" (60 mm)
Fuel: in (mm)	0.315" (8 mm)
Sea Water: in (mm)	1" (25 mm)
Engine Max Install. Angle	15°

Nm	kg.m
107.9	11
98.1	10
88.3	9
78.5	8
kW	hp
28.0	38
26.5	36
25.0	34
23.6	32
22.1	30
20.6	28
19.1	26
17.7	24
16.2	22
14.7	20

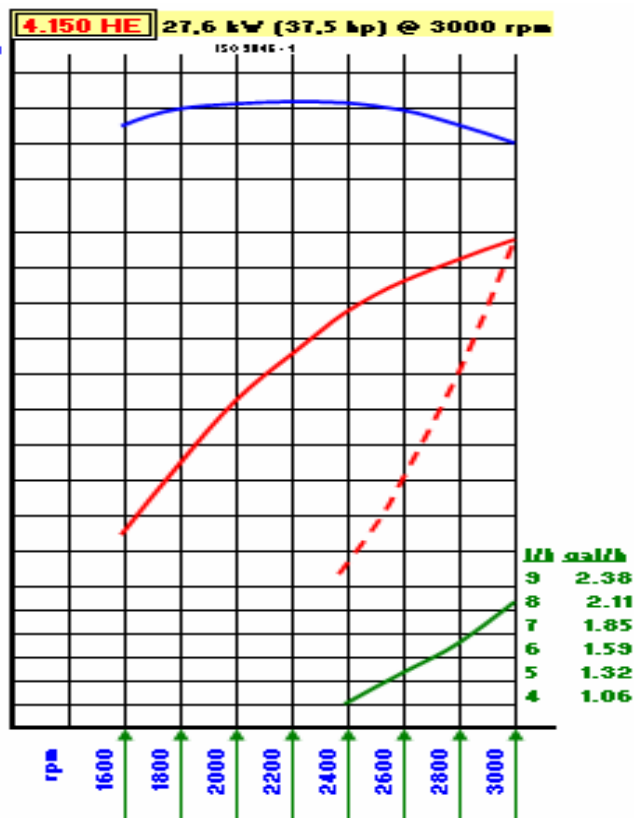

NANNI DIESEL recommends


MOTUL

4.150 HE

Kubota BASE

Line drawings

4.150 HE / TMC 40

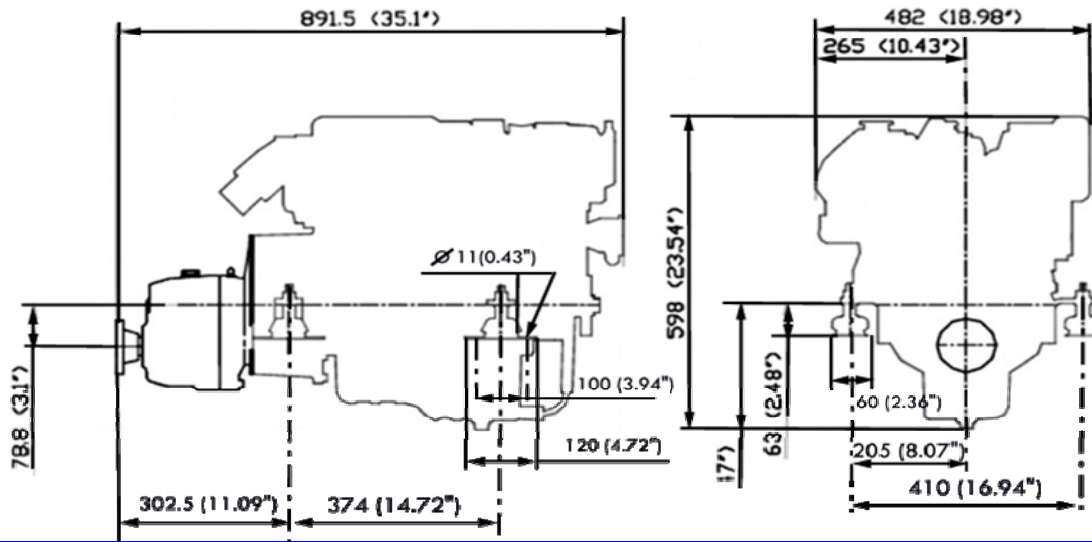

Standard Equipment

- A 3 Instrument Panel
 - _ Tachometer / hourmeter
 - _ Oil Pressure Warning Light & Audio Alarm
 - _ Water T° Warning Light & Audio Alarm
 - _ Battery Charge
 - _ Glow Plugs
 - _ Starter Key
- Mechanical Transmission
- Prearrangemt for cable use
- Engine Mounts
- Owners Manual
- Warranty Certificate
- Electrical Harness 13' (4m)



- Heath Exchanger
- Fresh Water Pump
- Thermostat
- Sea Water Pump
- Fresh Water Cooled Exhaust Manifold
- Exhaust Manifold With Water Injection
- In Line Injection Pump
- Fuel Pump
- Fuel Filter
- Oil Filter
- Electrical Wiring 12 V
- Oil Drain Pump
- Electrical Stop

Optional

- Bipolar Electrical Wiring
- Power Take-Off
- Coupling
- Propeller shaft
- Exhaust System
- Remote Control
- Sea Water Hoses
- Fuel Hoses
- Sea Water Filter
- Keel Cooling
- B3/C3 Instrument Panel