

nannidiesel

energy in blue



Kubota BASE

4.340 TDI

95,7 kW (130 hp)


Technical Specifications

Power	95,7 kW (130 hp)
Maximum RPM	2600 RPM
Displacement	202.54 ci (3319 cc)
N° of cylinders	4 in line
Bore / Stroke	3.86x4.33" (98x110 mm)
Compression Ratio	21,8 / 1
Injection	Indirect (E-TVCS)
Intake	Turbo intercooler
Cooling System	Heath Exchanger
Alternator	12 V 100 A
Instrument Panel	C 3 luxe
Transmission	Hydraulical
Weight (incl trans)	815.9 lb (370 kg)

Hose Diameters

Exhaust	4" (104 mm)
Fuel	0.32" (8 mm)
Sea Water	1.12" (32 mm)
Engine Max Install. Angle	15°

Nm	kg.m
402.2	41
392.4	40
382.6	39
372.8	38
363.0	37
353.2	36
343.4	35
kW	hp
95.7	130
88.3	120
81.0	110
73.6	100
66.2	90
58.9	80
51.5	70

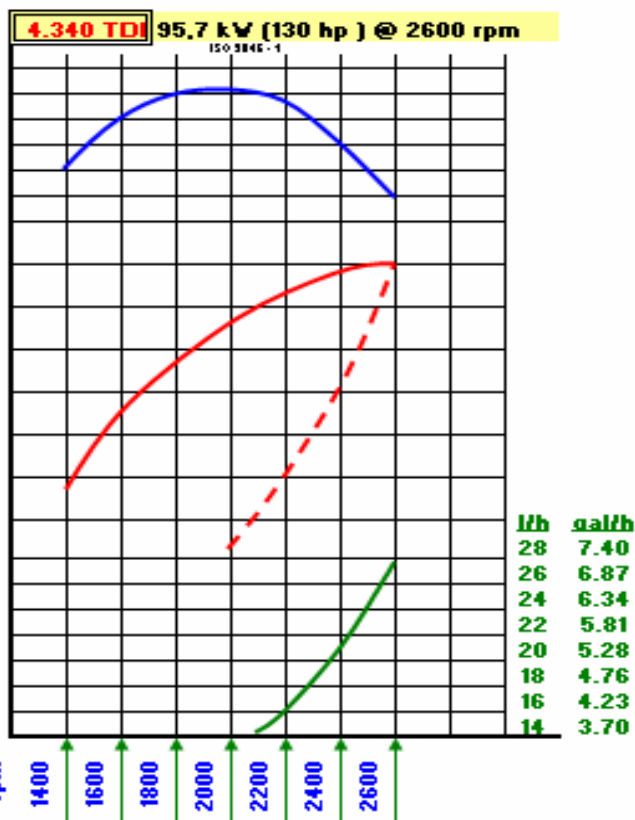

NANNI DIESEL recommends


MOTUL

4.340 TDI

Kubota BASE

Line drawings

4.340 TDI / ZF 45A

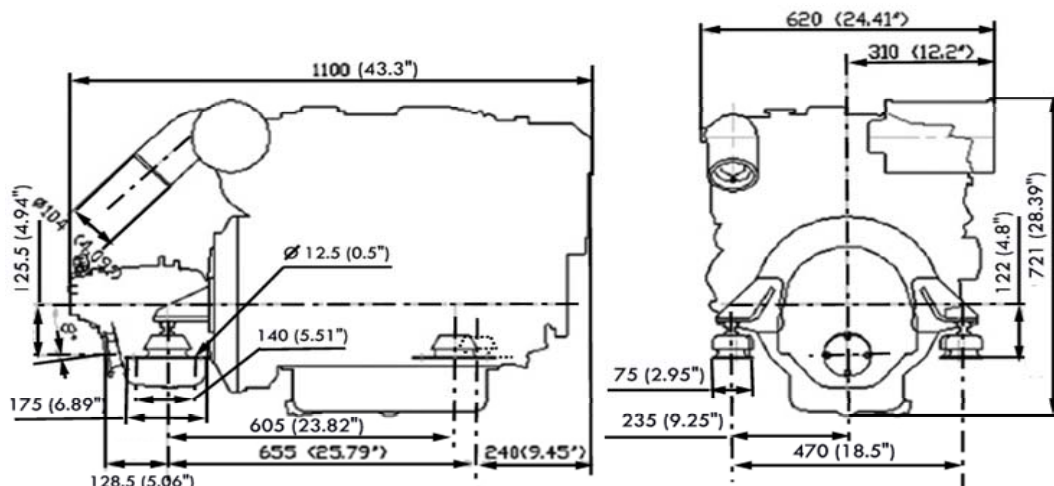

Standard Equipment

- C 3 lux Instrument Panel
 - _ Tachometer / hourmeter
 - _ Oil Pressure Warning Light & Audio Alarm
 - _ Water T° Warning Light & Audio Alarm
 - _ Battery Charge
 - _ Glow Plugs
 - _ Water temperature indicator
 - _ Battery charge indicator
 - _ Oil pressure indicator
 - _ Starter Key
- Hydraulic Transmission
- Prearrangement for cable use
- Engine Mounts
- Owners Manual
- Warranty Certificate



(270 x 188 mm)
10 ± 7.4"

- Electrical Harness 13' (4m)
- Heat Exchanger
- Fresh Water Pump
- Thermostat
- Sea Water Pump
- Fresh Water Cooled Exhaust Manifold
- Exhaust Manifold With Water Injection
- Turbo Compressor
- In Line Injection Pump
- Fuel Pump
- Fuel Filter
- Oil Filter
- Extraction Oil Pump
- Electrical Wiring 12 V
- Electrical Stop

Optional

- Bipolar Electrical Wiring
- Power Take-Off
- Coupling
- Propeller shaft
- Exhaust System
- Remote Control
- Sea Water Hoses
- Fuel Hoses
- Sea Water Filter
- Angled or V transmission
- Additional alternators
- Trolling valve