


nannidiesel

energy in blue

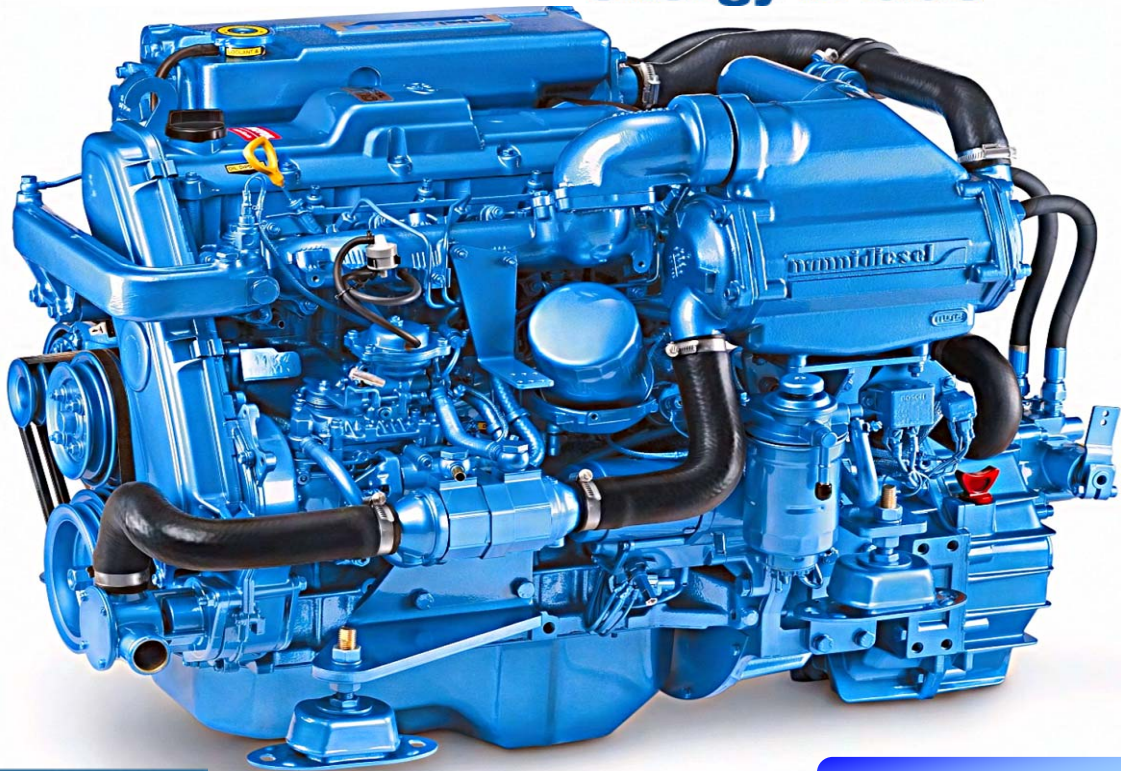

4.390 TDI

147,2 kW (200 hp)


Technical Specifications

Power	147.2 kW (200 hp)
Maximum RPM	3600 RPM
Displacement	181.97 ci (2982 cc)
N° of cylinders	4 in line
Bore / Stroke	3.78x4.05" (96x103 mm)
Compression Ratio	19,7 / 1
Injection	Indirect
Intake	Turbo intercooler
Cooling System	Heath Exchanger
Alternator	12 V 80 A
Instrument Panel	C 3
Transmission	Hydraulical
Weight (incl trans)	781 lb (355 kg)

Hose Diameters

Exhaust	3.50" (90 mm)
Fuel	0.40" (10 mm)
Sea Water	1.50" (38 mm)
Engine Max Install. Angle	15°

4.390 TDI 147,2kW (200 hp) @ 3600 rpm

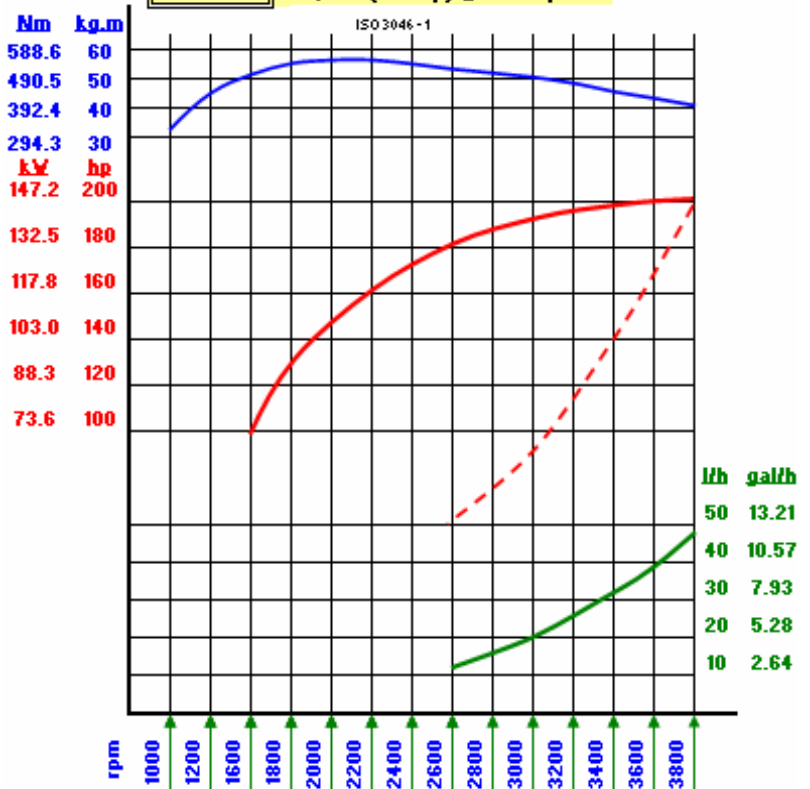

NANNI DIESEL recommends





4.390 TDI

Kubota BASE

Line drawings

4.390 TDI / ZF 45A

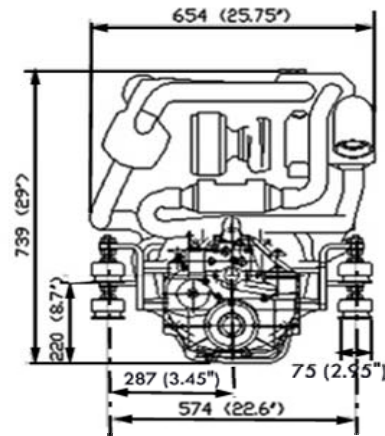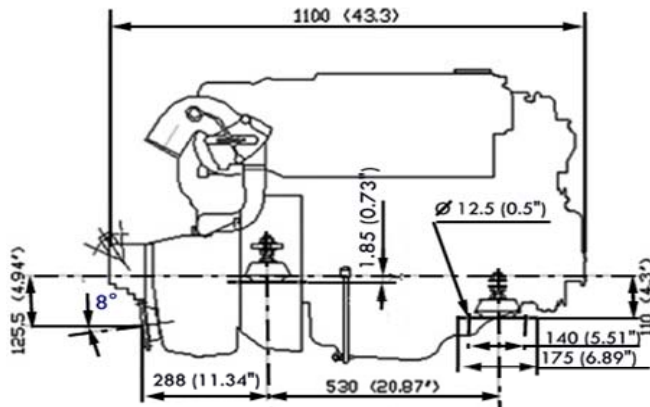

Standard Equipment

- C 3 lux Instrument Panel
 - _ Tachometer / Hourmeter
 - _ Oil Pressure Warning Light & Audio Alarm
 - _ Water T° Warning Light & Audio Alarm
 - _ Battery Charge
 - _ Glow Plugs
 - _ Water temperature indicator
 - _ Battery Charge Indicator
 - _ Oil Pressure Indicator
 - _ Starter Key
- Hydraulical Transmission
- Prearrangement for cable use
- Engine Mounts
- Owners Manual
- Warranty Certificate
- Integrated Oil Cooling



(270 x 188 mm)

10 ± 7.4"

- Fuel Cooling
- Electrical Harness 13' (4m)
- Heat Exchanger
- Fresh Water Pump
- Thermostat
- Sea Water Pump
- Fresh Water Cooled Exhaust Manifold
- Exhaust Manifold With Water Injection
- Turbo Compressor
- In Line Injection Pump
- Fuel Pump
- Fuel Filter
- Oil Filter
- Extraction Oil Pump
- Electrical Wiring 12 V
- Electrical Stop

Optional

- Bipolar Electrical Wiring
- Coupling
- Propeller Shaft
- Exhaust System
- Remote Control
- Sea Water Hoses
- Fuel Hoses
- Sea Water Filter
- Angled or V transmission
- Additional Alternators
- Flying Bridge Instrument Panel
- Trolling valve